


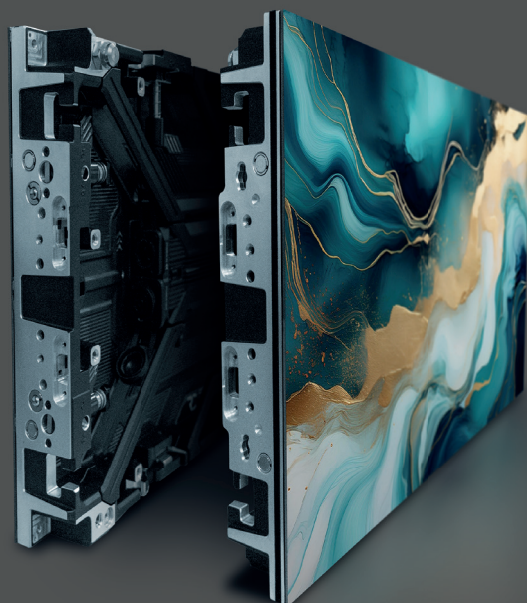

Model name	ENKI
Pixel pitch	0.9375 mm
Brightness	≥ 1200 nit
Pixel density	640 x 360 px/cabinet; 1,137,778 px/m ²
LED-type	COB (Chip-on-Board), Flip Chip
Lifespan LED	100,000 hours
Viewing angle	160° horizontal; 160° vertical
Input frequency	50 to 60 Hz
Processing	Novastar, CA50E (5G) Receiving Card
Bit depth	16 bit
Refreshrate	7680
Power consumption	Maximum: 480 W/m ² Average: 160 W/m ²
Input voltage	100 - 240 V / 50 - 60 Hz
Temperature operating	0 to 45 °C
Humidity operating	10 to 90 %
Cabinet dimensions	600 x 337 x 77 mm (WxHxD); (=0,20 m ²)
Weight	7,2 kg/cabinet
Maintenance	Front/Back maintenace
Protection	IP30
Certification	CE, RoHs, EMC class B, TÜV